


Specification		
Model	SS-1212	
Casing	Material: SUS 304 Thickness: 6.0mm	
Rotating Shaft	Material: SUS 304 (27shafts)	
Screen	Flow Passage Width	1180mm
	Rotating Oval Plates	12 rows (Material: SUS301-CSP t0.5mm)
	Gap	1.0mm
Drive Unit	Gear Motor	
	3 ϕ 200V 0.75kW	
	Reduction Gear Ratio 1/150	
	Revolution Speed 9.6r/min(50Hz), 11.5r/min(60Hz)	
	Rated Current Value 4.29A(50Hz), 3.73A(60Hz)	
Class E Insulation, TEFC Outdoor Type		
Painting Colour : Manufacturer Standard		

Drawing for Reference

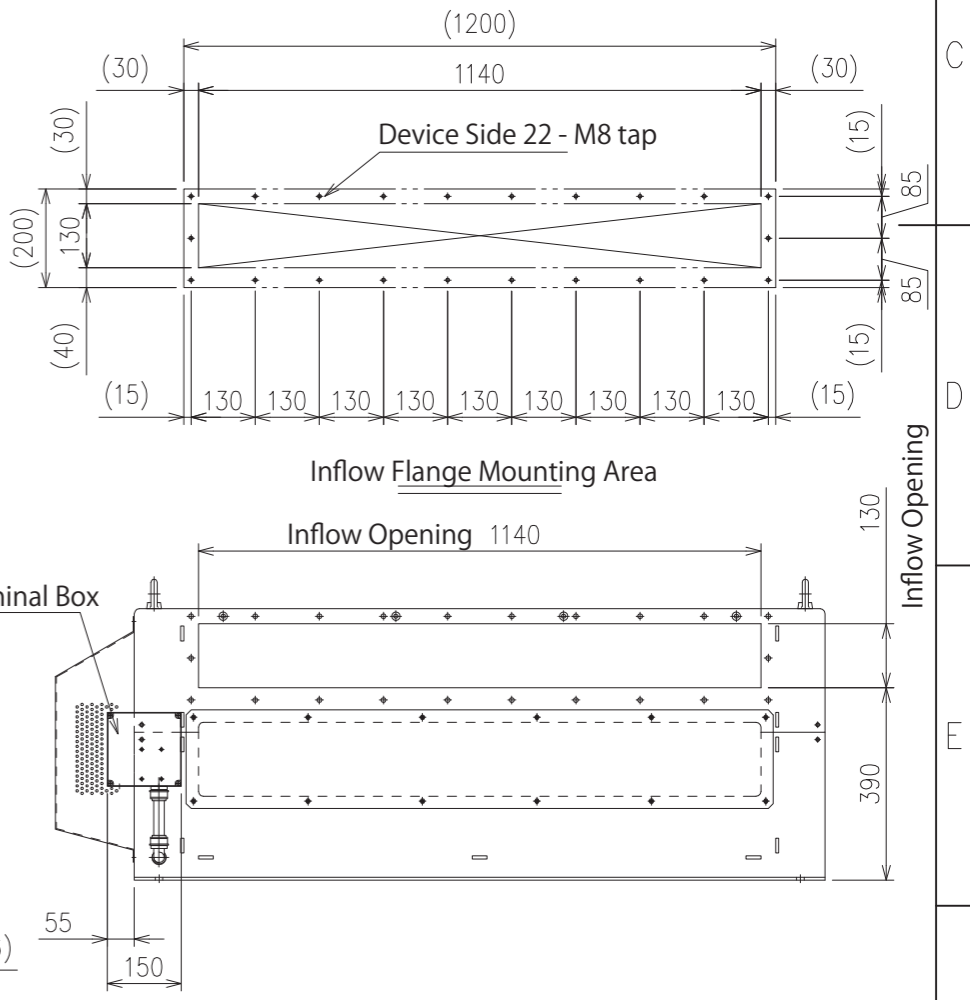

The drawing is for reference only and subject to change without notice.

	-	-	-	製図	-	-		品番/ITEM NO.	型式/MODEL	図面名称/DRAWING NAME	装置名称/UNIT NAME	単位	尺度	サイズ	変更回数
	-	-	-	設計	-	-		-	SS-1212	Outline Drawing	Thickening Model	mm	1:15	A3	△
	-	-	-	検図	-	-		-	工番/JOB NO.	図面番号/DRAWING NO.	御客様社名/CLIENT	-	投影法	年月日	REV.
	記号	年月日	記事	訂正者	承認	-		-	-	-	-	-	第一角法	DATE	2021-01-06
MARK	DATE	CONTENT	REVISED	APPROVED	-	-	-	-	-	-	-	-	-	-	-

株式会社 研電社
KENDENSHA Co.,Ltd